





# Cuadro

## Step Light



The Cuadro Step Light is defined by a minimalist architectural design and a wide light distribution. Perfect for illuminating pathways evenly, its wide beam allows for the installation of less luminaires compared to traditional step lights. Discreet yet highly practical, this step light will meet the demands of any application.

Options	2W
(Square)	 90x90mm (77x77mm with wallbox)
Lumen Output	60lm (at 3000K)
Beam Angle	90°

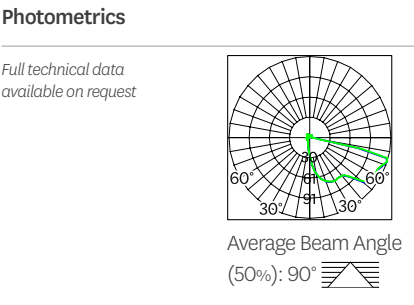

### Specifications

Finish	UV Textured Black	Lifetime	Reported L70 > 36,000h	Wallbox	Included
	UV Textured White	Power Factor	> 0.90	Notes	
	Anodised Aluminium	Driver (sold separately)	24V IP20 16W / 36W / 60W	Remote driver required for DALI capabilities. Osram, Tridonic and Meanwell control gear are available upon request. Lumen output may vary depending on colour temperature, beam angle and CRI.	
Colour Temperature	2,700K		24V IP68 16W / 36W / 60W / 120W / 320W	Dimmable driver option available	
	3,000K				
	4,000K				
IP Rating 65	CRI 80+			3yr Warranty	DALI Optional IP65
Colour Deviation	SDCM ≤ 3 (MacAdam)	Wiring	Wired in parallel	Dimmable Optional	Coastal Rated

